

BG, the world leader in planar ribbon loudspeakers, proudly introduces the RT Series-- new, highly affordable custom speakers to accommodate every budget. Combining our patented technology with the latest design and manufacturing techniques allows BG to offer unprecedented value. Now your customers can enjoy highly acclaimed planar ribbon performance for the price of conventional technology.

The RT-Series make world class custom sound available to more projects, rooms and listeners than ever before. BG's new line features three models: the RT-6 rectangular in-wall speaker, the RT-6C round in-ceiling speaker and the RT-6CJ, the most affordable planar ribbon custom speaker on the market today.

Best of all, the RT's are not only exciting to listen to, they are a dream to install. Backed by a lifetime warranty with quality construction and components throughout, each model features screw actuated glass-filled dog clamps for fast, sure installation. Your customers will enjoy the RT's great planar ribbon sound while you are on your way to the next project.

- **Unique technology** Patented planar ribbon tweeters, based on BG's award-winning designs, are similar to those found in the world's finest speakers
- **Wide dispersion** Planar ribbon technology provides smooth, balanced coverage over the entire listening area with an extra wide "sweet spot" to enjoy
- **Amazing detail and clarity** The BG planar ribbon tweeter deliver best-in-class performance with lifelike imaging and faithful reproduction
- **Dynamic bass** High performance woofer with poly composite cone and rubber surround delivers clean, extended bass
- **Quality construction** Rugged, robust and reinforced loudspeaker frame combined with rust-resistant metal grills deliver a lifetime of trouble-free service



RT-6



RT-6C




RT-6CJ

Custom Loudspeakers

RT-Series

planar ribbon technology

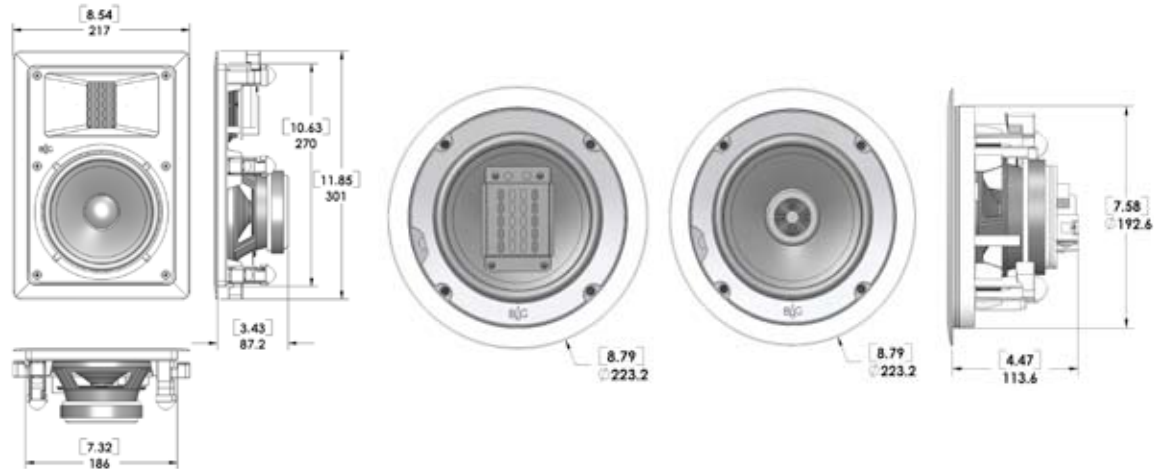

	RT-6	RT-6C	RT-6CJ
Overall dimensions	8 9/16" x 11 7/8"	8 13/16" x 4 1/2"	8 13/16" x 4 1/2"
Cutout dimensions	7 1/4" x 11 7/8"	7 3/4"	7 3/4"
Installed depth	3 7/16"	4 1/2"	4 1/2"
Installed weight	4 lbs. (1.8 kg.)	4 lbs. (1.8 kg.)	3.5 lbs. (1.5 kg.)
Driver complement	6.5" Poly cone, ferrite magnet woofer and Neo3PDR planar ribbon tweeter	6.5" Poly cone, ferrite magnet woofer and Neo3PDR planar ribbon tweeter	6.5" Poly cone, ferrite magnet woofer and Neo1 planar ribbon tweeter
Crossover point	2 kHz second order LR	2 kHz second order LR	3 kHz second order LR
Frequency response	50 Hz - 25 kHz	50 Hz - 25 kHz	55 Hz - 25 kHz
Sensitivity, 2.83V, 1m	88 dB	88 dB	87 dB
Rated impedance	8 Ohms	8 Ohms	8 Ohms
Power handling	80 W RMS	80 W RMS	80 W RMS
Warranty¹	Lifetime to the original owner		

¹ Warranty: Please see BG warranty for complete details

